

dic DEN-ON SOLDER CLEANER SC-400A

Solder Desoldering Tool

ESD
SAFE

**Designed For Lead Free
Designed For SMT and Thru-hole
Desoldering of Eutectic or Lead
Free Solders.**

delivers quick and powerfull suction for easy clean up.



POINTS

- powerful suction and easy clean up.
- Light Weight for ease of use fore even long periods.
- Low noise and vibration for user comfort.


◆ ESD SAFE, CE (PSE)



SOLDER CLEANER SC-400A


Solder Cleaner “Designed for Lead Free”

STATION Spec

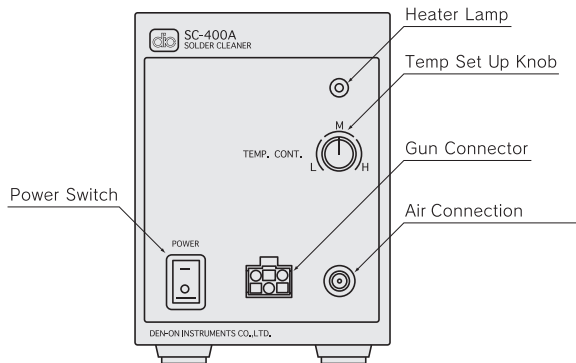


Power	AC100V · 120V · 230V 50/60Hz
Power Consumption	Max 240W Stabilized 70W (Include Gun)
Air Supply	Insert 0.3Mpa for Compressed Air or Nitrogen
Dimensions (mm.)	W100mm D170mm H136mm
Weight (g)	1600g
Cord Length	2m

GUN Spec

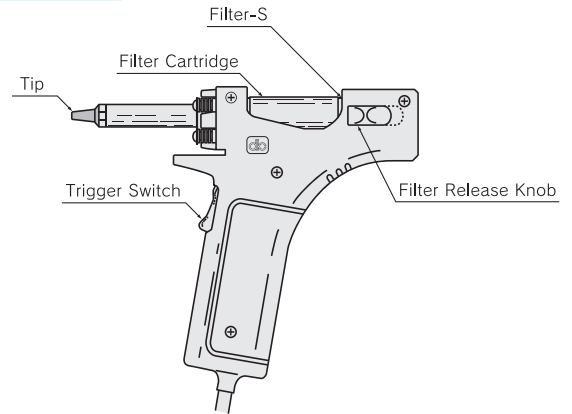

Heater	Ceramic Zero-Cross Switched
Installation Resistance	100MΩ (400°C)
Vacuum Power	-62 kpa
Max Temp	480°C
Dimensions (mm.)	W190 D28 H155
Weight (g)	300g
Cord Length	1 m

Other Tips

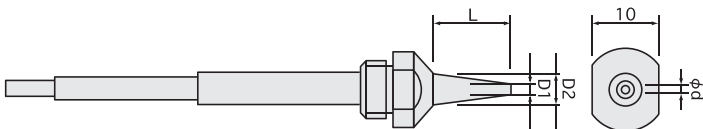

Specification	Marking	Ref	φd	φD1	φD2	Lmm
50-01-11	0.8 Std	0.8	0.8	2.5	7.0	12.5
50-01-12	0.8 SLIM	0.8S	0.8	2.0	6.0	14.0
50-01-13	0.8 U.SLIM	S8	0.8	1.5	5.0	11.5
※ 50-01-14	1.0 Std	1.0	1.0	2.5	7.0	12.5
50-01-15	1.5 Std	1.5	1.5	3.0	7.0	12.5
50-01-16	1.0 SLIM	10S	1.0	2.0	6.0	14.0
50-01-17	1.5 SLIM	15S	1.5	2.2	6.0	14.0

※ One piece of tip 1.0mm (50-01-14) is fitted in the main body.

OPTION

- **Filter Cartridge** (Glass Made)
Ref (100-439)



Combination Option for a better use

Spot Pre-heater to help fast and efficace cleaning

- **PH-400**



MANUFACTURER

DEN-ON INSTRUMENTS CO.,LTD.
1-26-10 SEKIMACHI-HIGASHI,
NERIMA, TOKYO 177-0052, JAPAN
TEL [81] 3-3929-6000 FAX [81]3-3929-7441

<http://www.denondic.co.jp>
rework@denondic.co.jp